

CHARACTERISTICS/TESTS

In accordance with ANSI C29.9

Glaze: Light-grey Munsell Notations N°70
 Approximate weight 138.9 lbs

DIMENSIONS

Minimum leakage distance 116 in

MECHANICAL VALUES

Cantilever breaking strength, upright 1400 lbs
 Cantilever breaking strength, underhung 1400 lbs
 Tensile breaking strength 20000 lbs
 Torsional breaking moment 40000 in.lbs
 Compression breaking strength 60000 lbs

ELECTRICAL VALUES

Guaranteed voltage:
 Critical impulse dry, wave 1.2/50 - positive polarity 710 kV
 Power frequency wet, withstand 275 kV
 Impulse dry, wave 1.2/50 - withstand, positive polarity 650 kV

Test voltage 88 kV
 Maxi RIV at 1 MHz 200 μV


GENERAL TOLERANCE

± (0.04d + 0.06) in., if d ≤ 11.8 in.

± (0.025d + 0.24) in., if d > 11.8 in.

CONVERSION TABLE

DIMENSIONS	1	mm	0.03937	inch
	25.4	mm	1	inch
FORCE	1	N	0.22481	pound
	4.448	N	1	pound
MOMENT OF FORCE	1	Nm	8.8495	inch-pound
	0.113	Nm	1	inch-pound

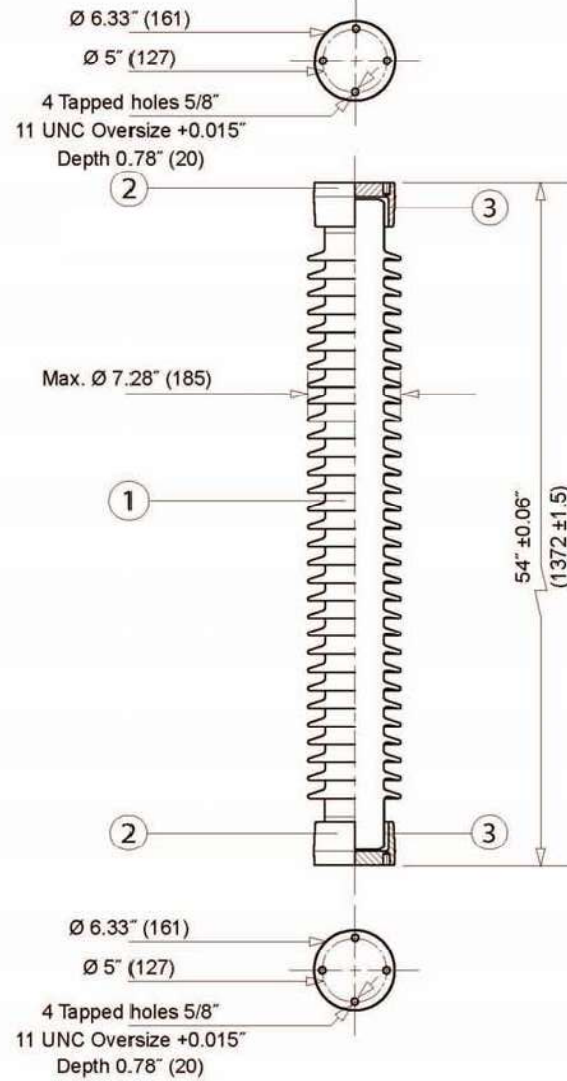

Outdoor Station Post Insulator
TR288
138kV / 650kV BIL

MV POWER
 Medium Voltage Solutions

MV POWER LLC
 2811 Hastings Road
 Erie, PA 16506
 Tel: 814-520-6385
 Email: info@mv-power.us
 Web: www.mvpower.us